



Felix Solutions

Marking, Coding and Packaging Machines Supplier
and Exporter

Dainyang Gokani
sales and Service Engineer



www.felixsolutions.in



+91 9653296469



sales1@felixsolutions.in

P-15 Technical Specifications

- Weight: 140 kg
- Power supply: 220 Volt 50/60 Hz 1ph.
- Environmental humidity conditions $\leq 90\%$
- Box transfer speed: 21 m/min
- Maximum box weight: 40 kg
- Use temperature: + 0 °C to + 40 ° C

- Maximum Noise: 75 db
- Electrical protection: IP 54
- Adhesive tape: Kraft, polypropylene, PVC
- *Rollers are made of SS for smooth working hours and longer life cycle.*
- Installed power: 0.40 Kw
- Power Saver
- Production- Depends on carton size and operator






FELIX

SOLUTIONS


STANDARD TECHNICAL FEATURES

- Carton dragging by side belts with independent motors.
- Top and bottom carton sealing.
- Weight 140 Kg.
- Adjustable working height from 570 mm to 800 mm § Adjustable tape tension.
- Interchangeable taping head which allows using tape from 48 mm to 72 mm width.
- Metal rollers for the transportation of carton.
- Adjustable top guides to keep flaps squared while sealing.
- Hand wheel adjustment of carton width and height.
- Emergency stop on top taping head for quick access

Length (mm)		Width (mm)		Height (mm)	
Min.	Max.	Min.	Max.	Min.	Max.
100mm	no limit	115mm	510 mm	120mm	490mm

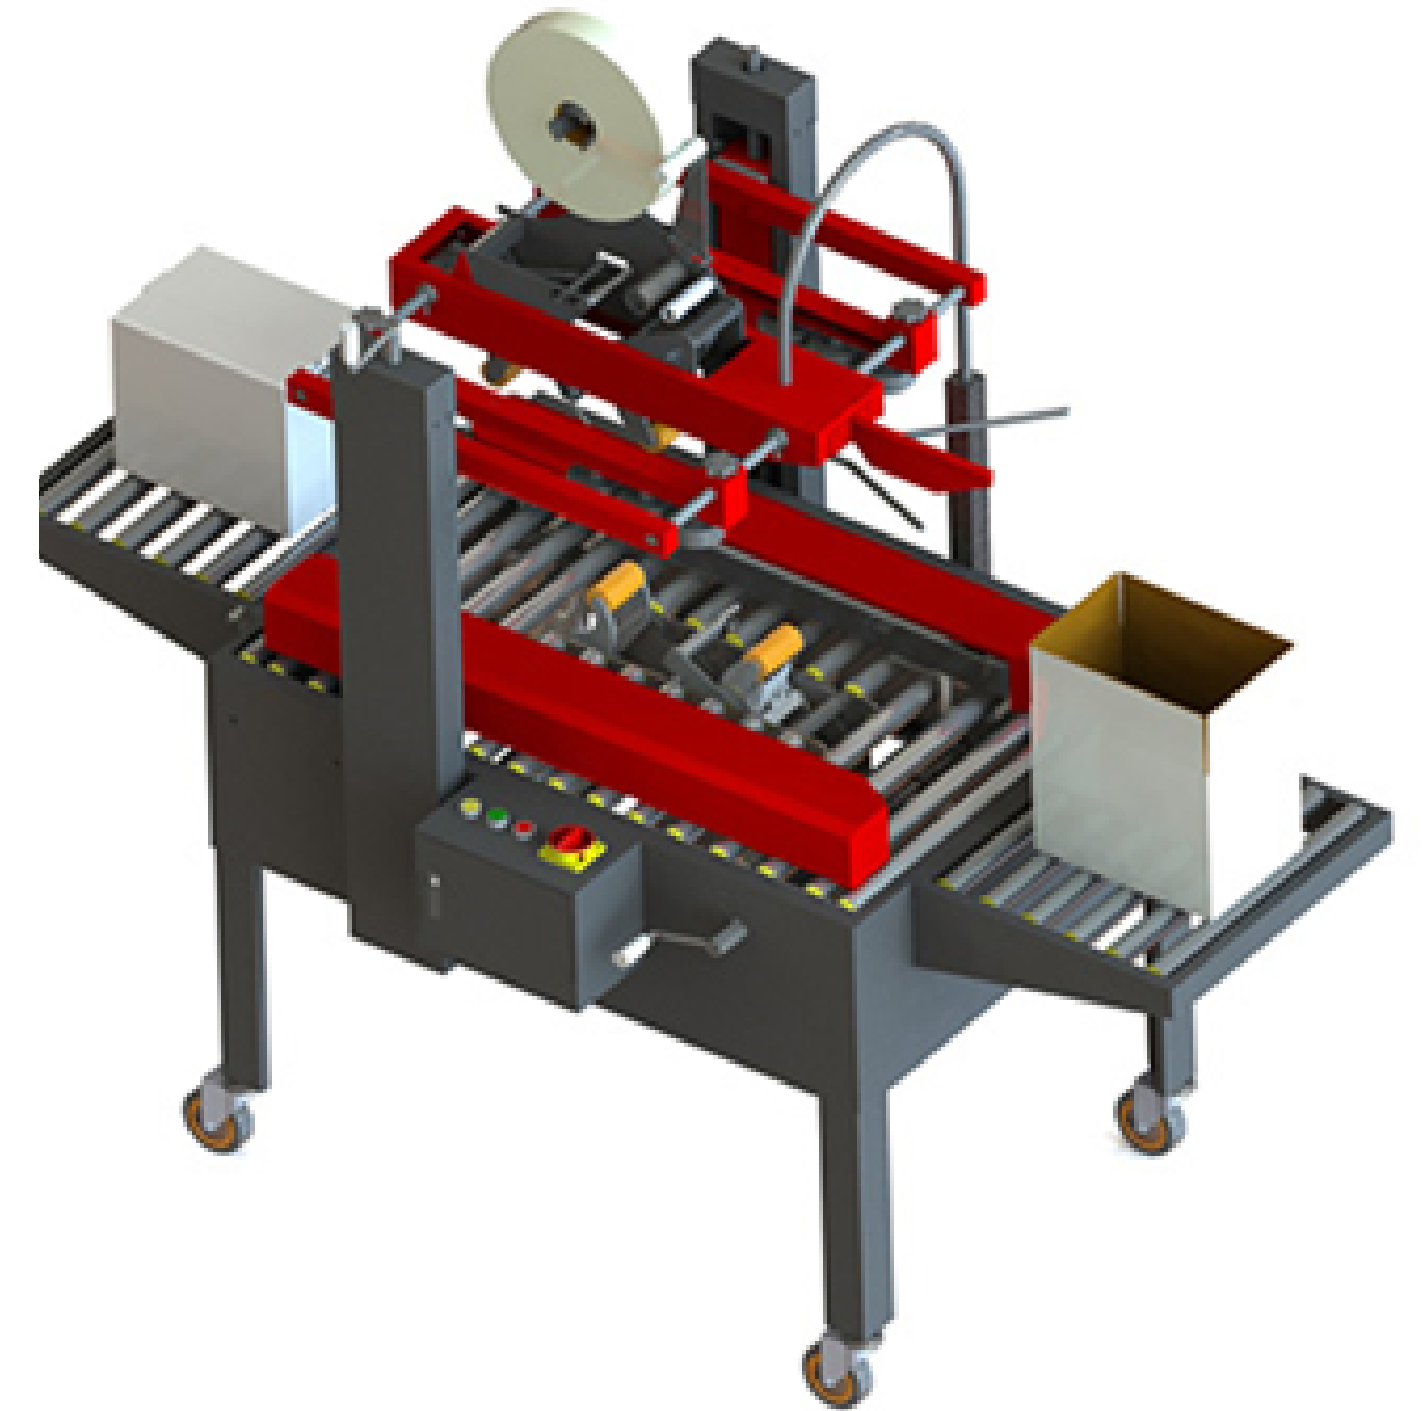

Closing process

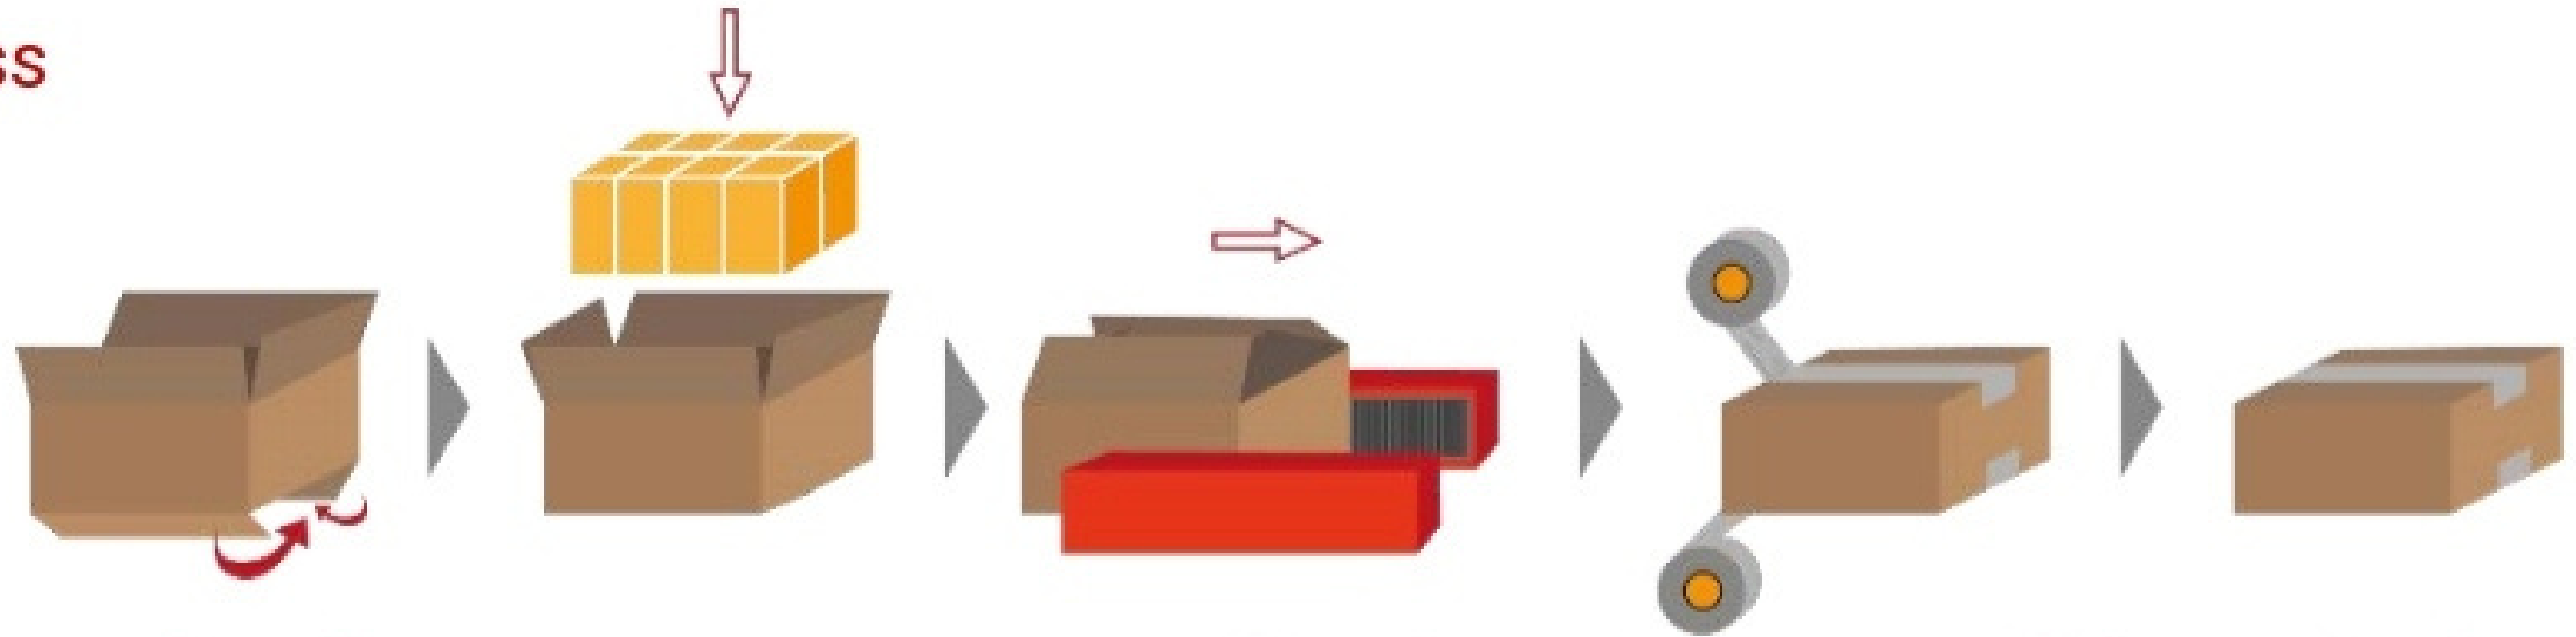

Quickly adjustment handles




Simple maintenance of the taping heads





FELIX
SOLUTIONS

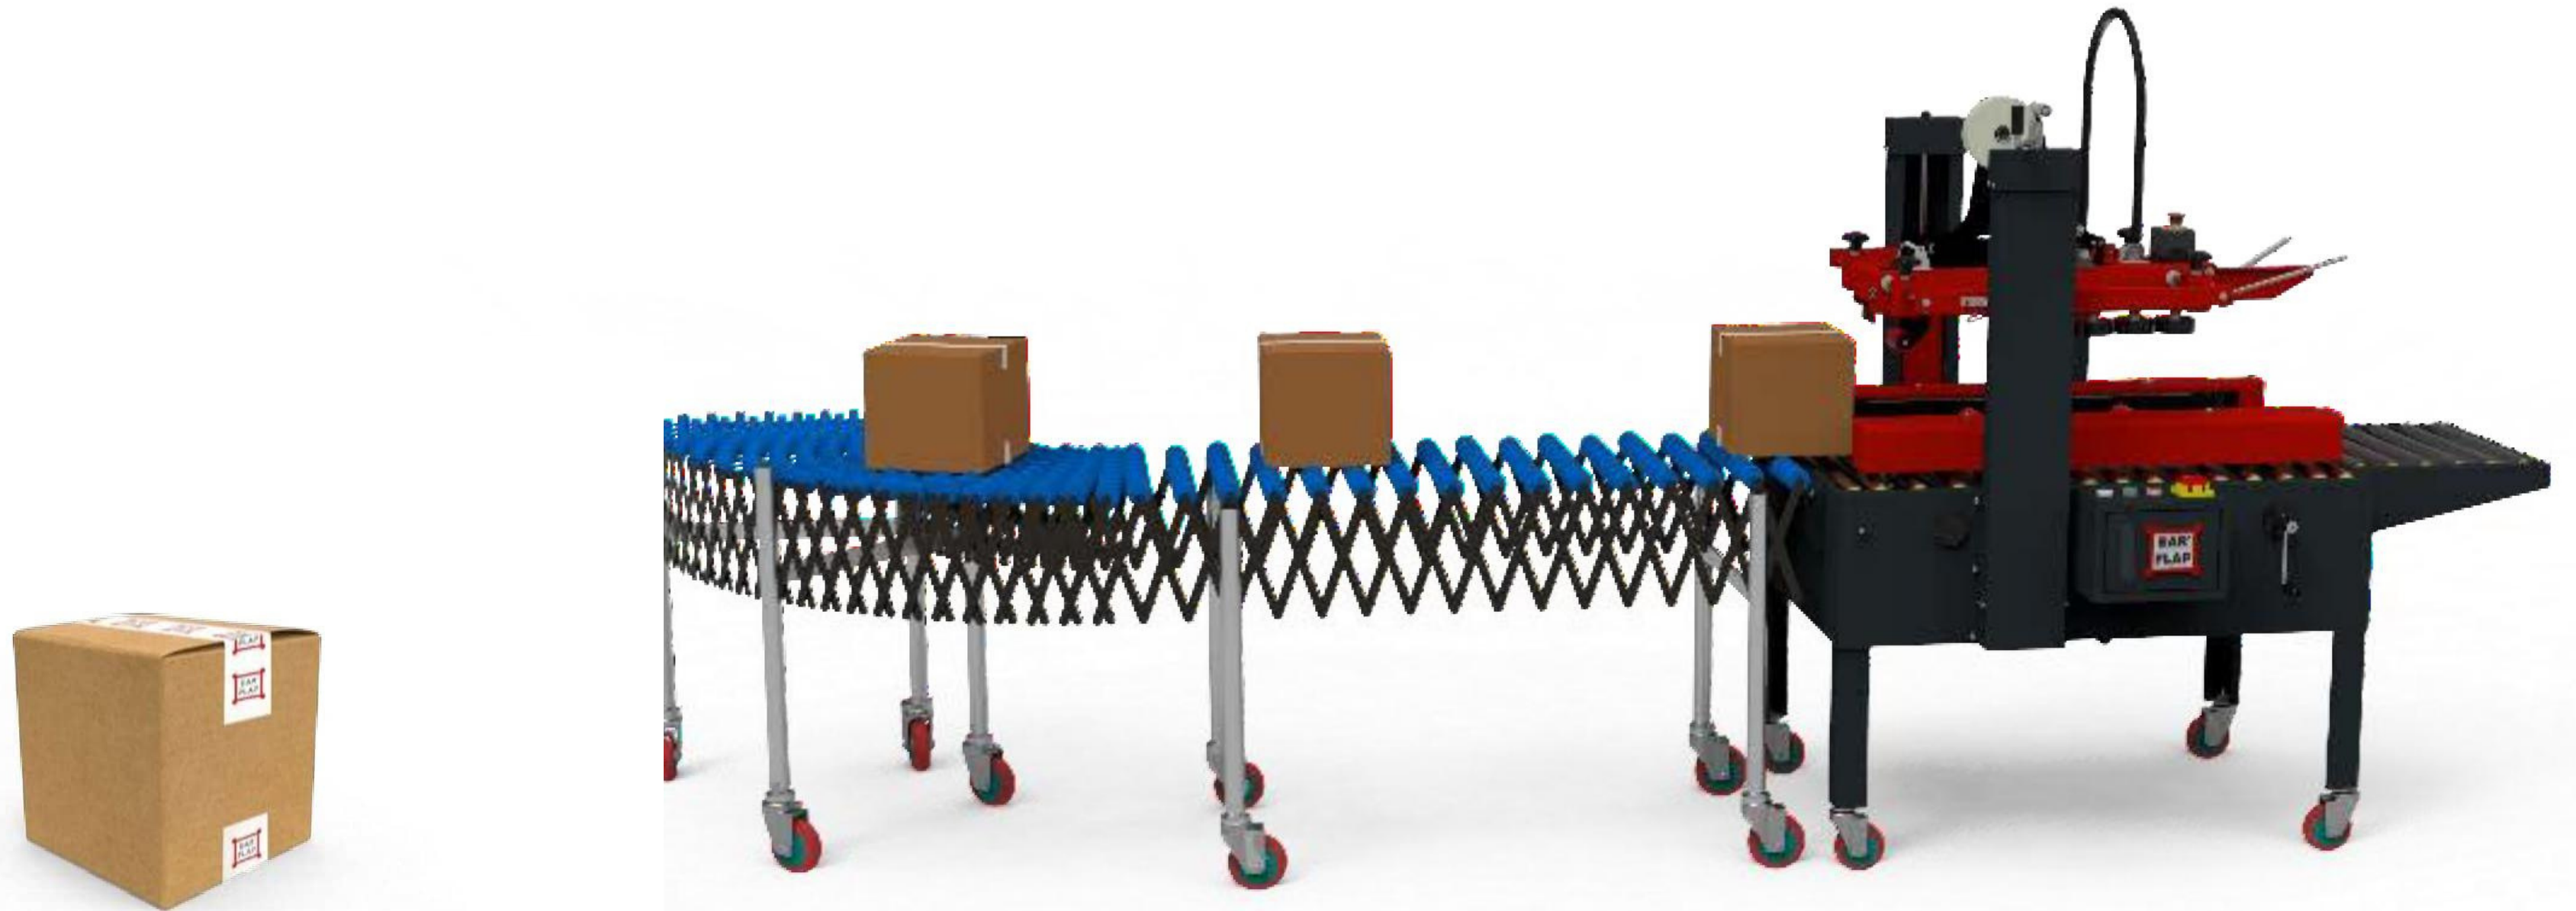

Carton sealing machine with flexible gravity roller conveyor



FELIX
SOLUTIONS

Our other products



Continuous Inkjet Printer



High Resolution Thermal Inkjet Printers



Laser Marking Machine



FELIX
SOLUTIONS

Our other products



Labelling Machines



Sealing Machines



Conveyors